



PROFILE PUBLICATIONS


The Vickers Valiant

NUMBER 66
TWO SHILLINGS

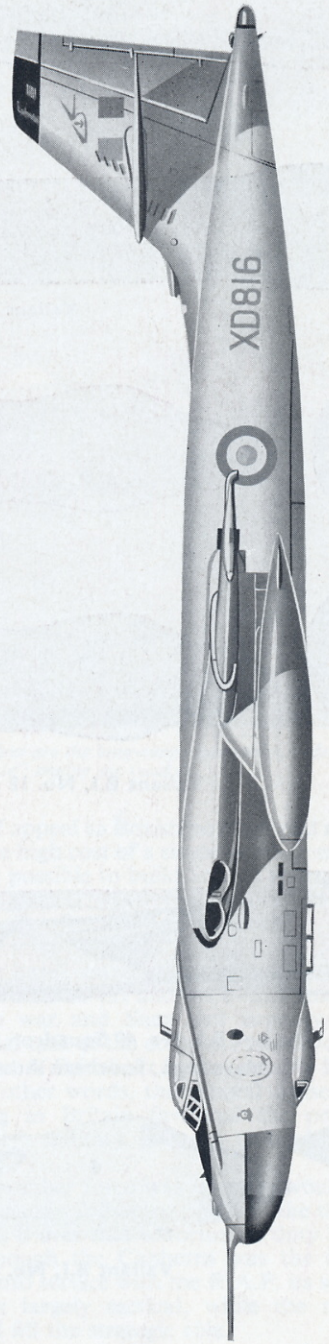


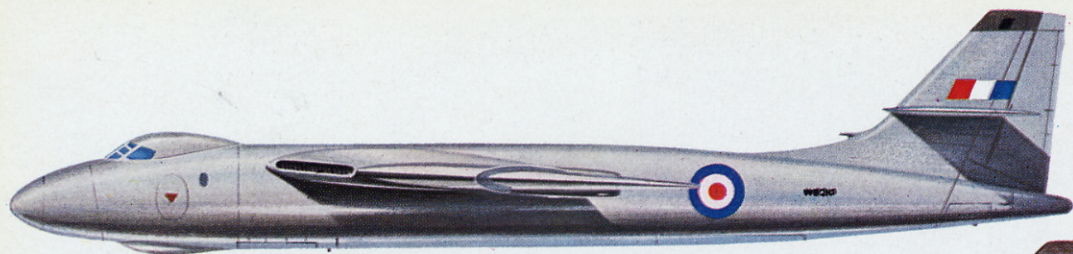


Valiant Prototype.

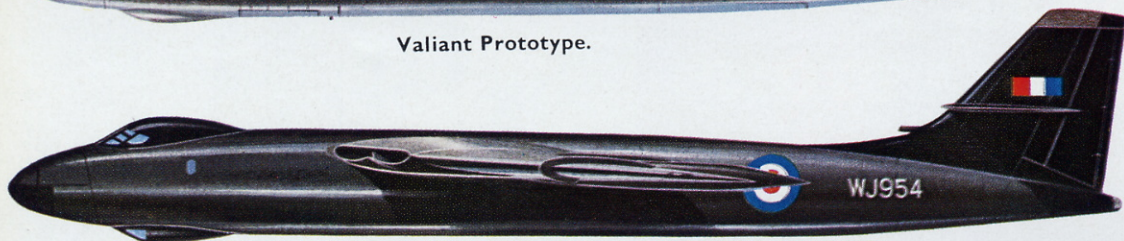


Valiant B. Mk. 2

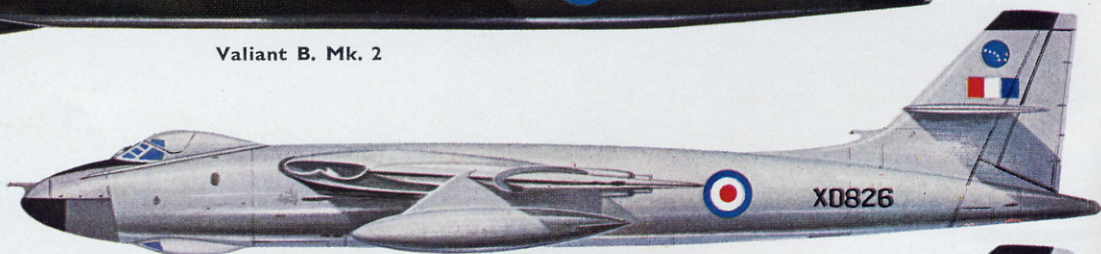

Valiant B.1, No. 7 Squadron, Honington, Suffolk.

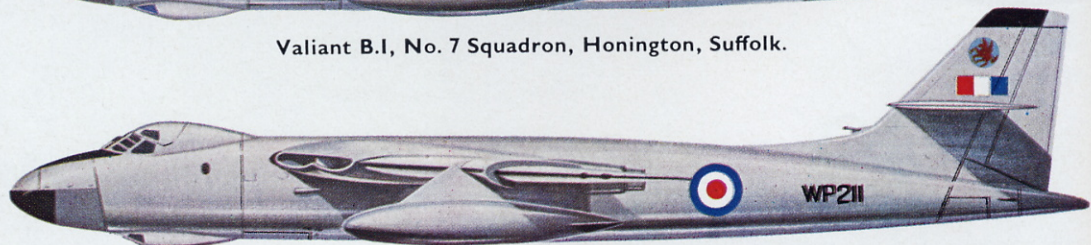


Valiant B.1, No. 18 (Burma) Squadron, Finningley, Yorks.

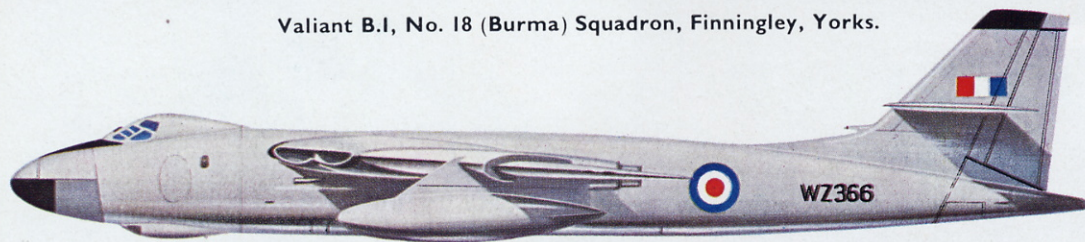

Valiant B.1, No. 49 Squadron, WZ366 dropped the first British atomic bomb over Maralinga, Southern Australia, 11th October 1956.






Valiant B.1, No. 90 Squadron, Honington, Suffolk.

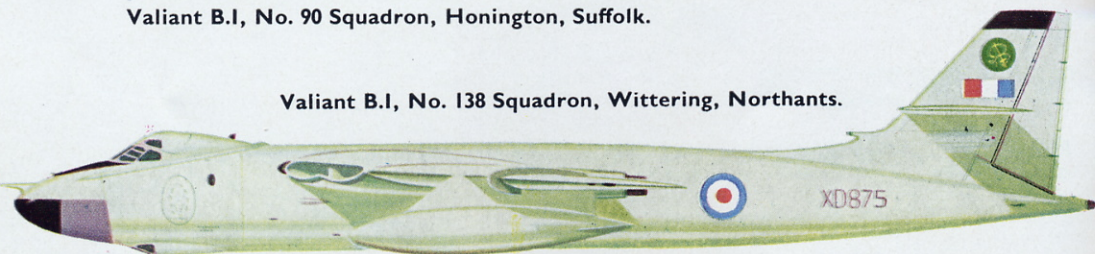



Valiant B.1, No. 138 Squadron, Wittering, Northants.

When flight-refuelling is not required on a mission, the nose probe may be removed and a plug fairing inserted. This is shown in the side-views.

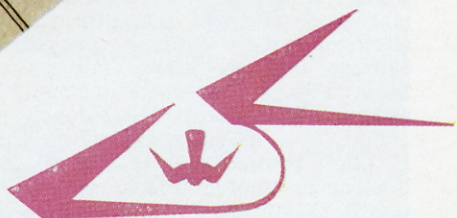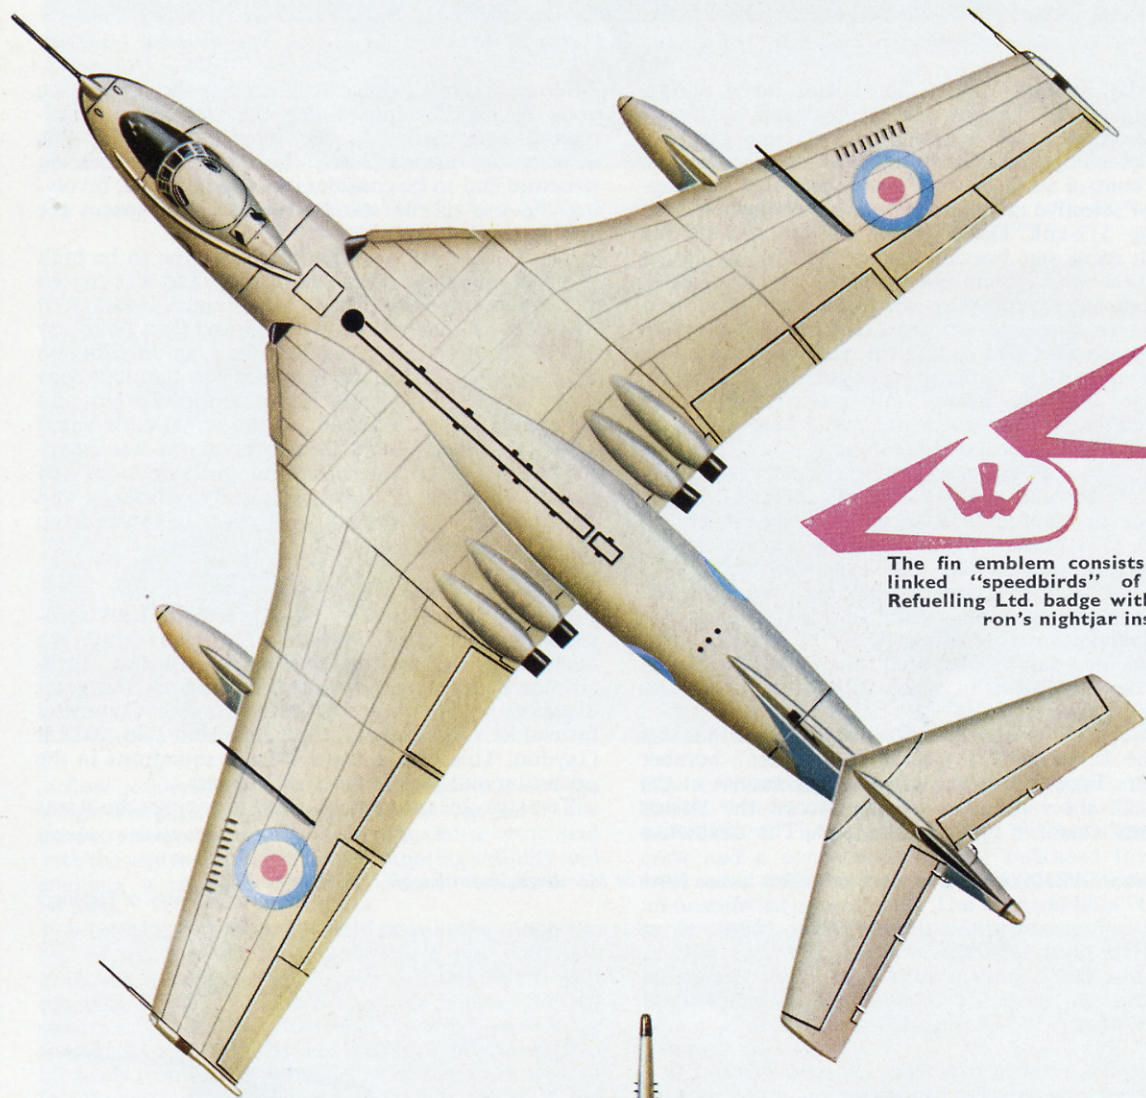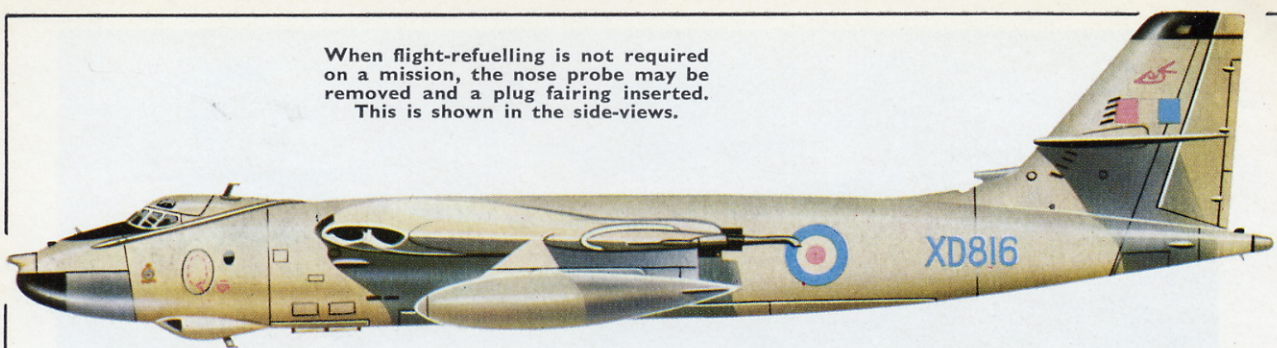


The fin emblem consists of the two linked "speedbirds" of the Flight Refuelling Ltd. badge with the Squadron's nightjar inset.

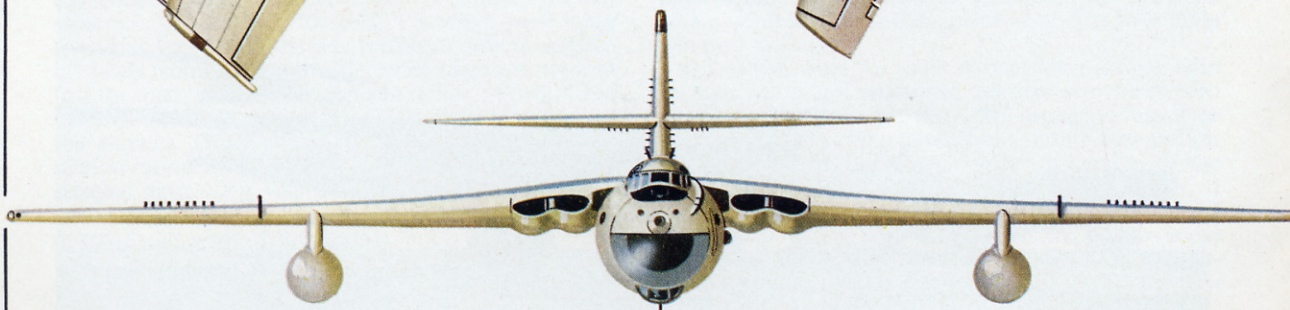

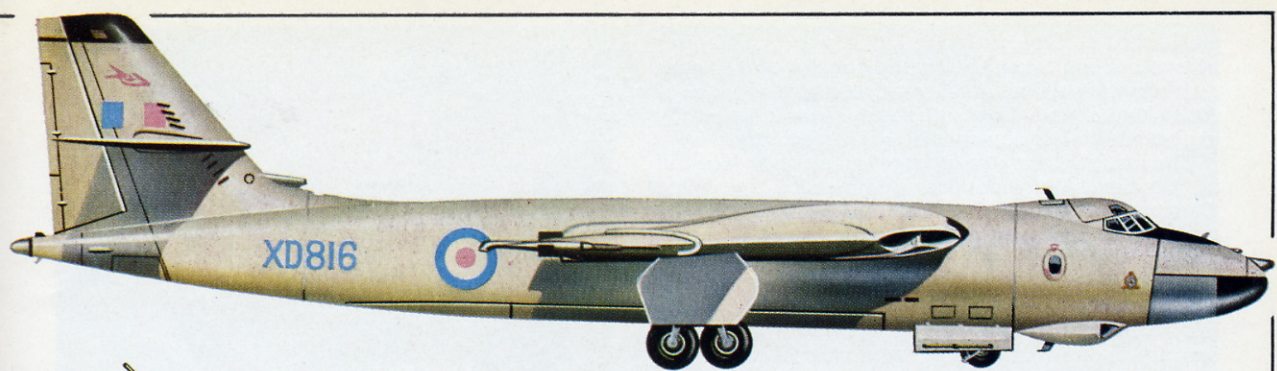


VALIANT B. (K) Mk. I flight-refuelling tanker, XD816, of No. 214 Squadron, Royal Air Force. Based at Marham, Norfolk, early in 1965.


No. 214 Squadron Badge. Motto: "Ultror in umbris" ("Avenging in the shadows"). The nightjar emblem signifies the Squadron's long association with night bomber operations.




©JAMES GOULDING

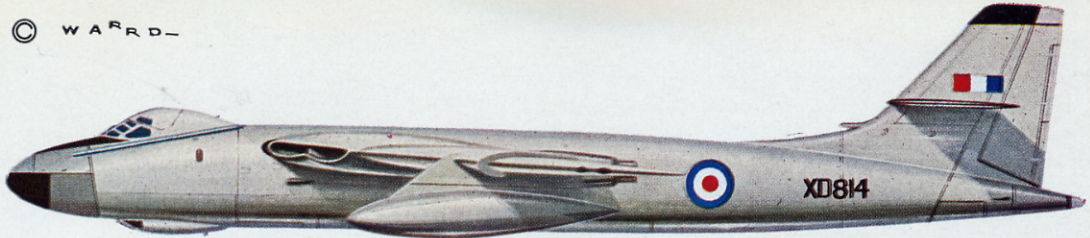


Valiant B.I, No. 148 Squadron, first V-bomber to drop bombs in anger on Almaza airfield, Cairo, November 1956.

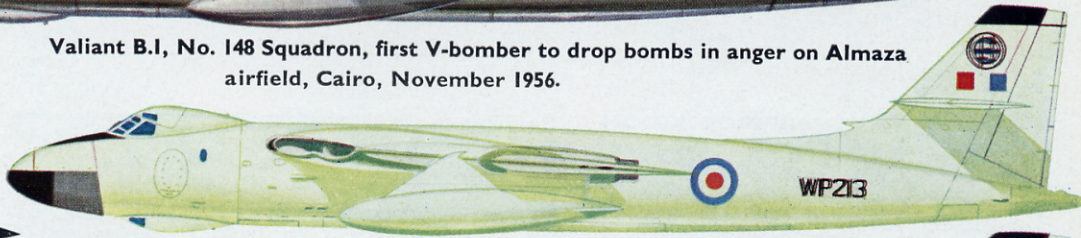


Valiant B.I, No. 199 Squadron, Honington, Suffolk.

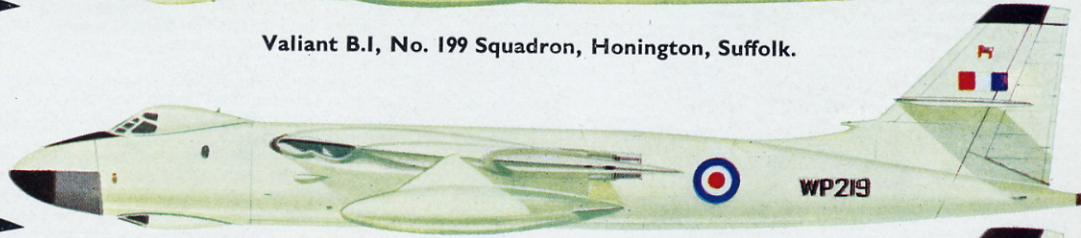


Valiant B.I, No. 207 Squadron, Marham, Norfolk.

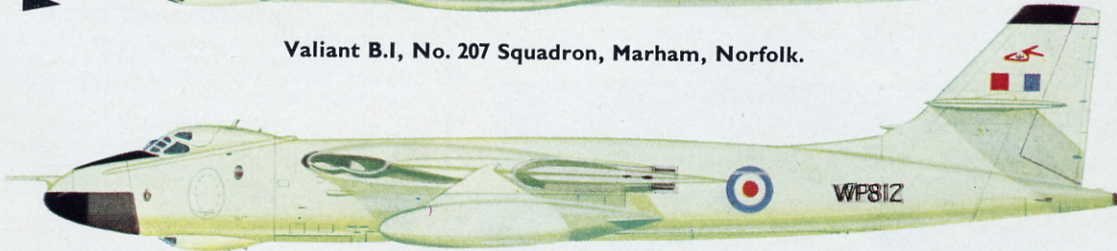

Valiant B.K.I, No. 214 (Federated Malay States) Squadron, Marham, Norfolk.




Starboard tank.




Port side underwing camouflage detail.




Plan view.

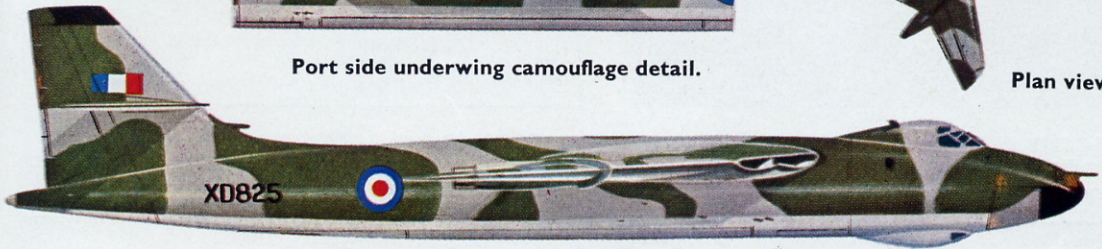

Valiant B.K.I showing typical camouflage pattern, the scheme varied somewhat aircraft to aircraft.

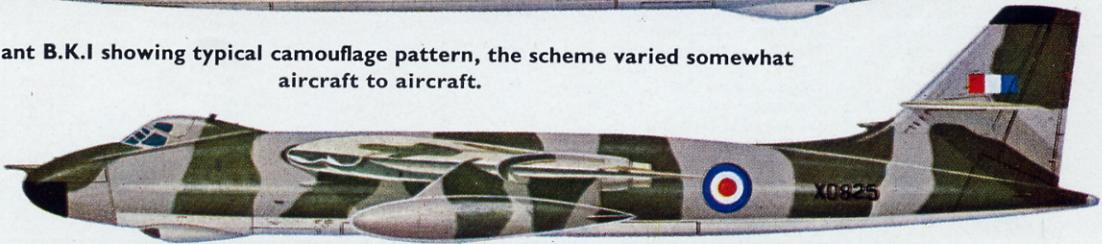

The Vickers Valiant

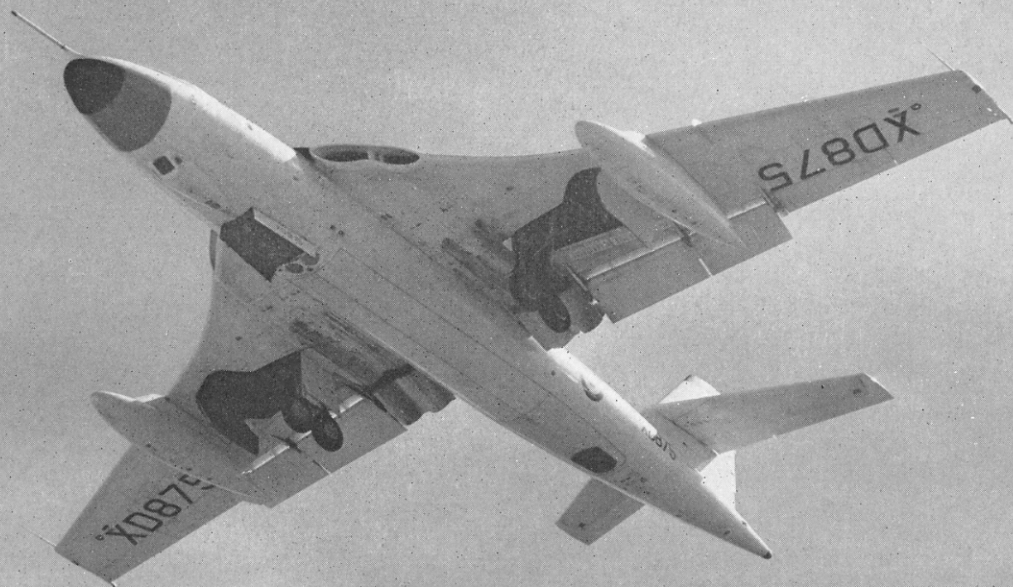

by C. F. Andrews

A Vickers Valiant (XD875) of Bomber Command taking-off from Marham airbase. Evident are the long-range fuel tanks, undercarriage wells and bomb aimer's blister and the improved type "spectacle" engine air intakes.

At the end of W.W.II, Bomber Command of the Royal Air Force was due to be completely re-equipped with the B.14/43 Avro Lincoln and the B.3/42 Vickers Windsor. Only the Lincoln went into production and the prevailing operational philosophy, which included heavy defensive armament and unpressurised crew accommodation, remained static. In the meantime the arrival of the turbojet engine and the nuclear bomb completely altered the picture. Their influence on Air Staff requirements was profound.

If a single weapon could do the work of a thousand-bomber raid of the war, there was no longer the need to maintain a large bomber force. Very high speeds could be attained with the steep rise in power output obtainable from the jet engine and very high operational ceilings could be reached by the introduction of pressure cabins, first explored and developed by Vickers in the Wellingtons V and VI. No defensive armament would be needed in a high speed, high altitude bomber and electronic equipment would provide precision bombing at the elevated speeds and heights made possible.

Therefore the proposition for a completely re-equipped bomber force was becoming reality. Bomber Command would then comprise a small number of high-performance aeroplanes designed to carry any type of bomb, including the "nuclear deterrent", at heights of not less than 50,000 ft. and at speeds approaching that of sound, that is Mach 0.9-1.0. This

prospect was of appeal to British political and military philosophy. The high cost of a single bomber made the numbers it was possible to build limited by exchequer resources in a period when the restoration of the national economy after the war was still a priority matter.

On the other hand, international incidents like the Berlin blockade and air lift and the events leading up to the Korean war and Suez lent urgency to the weighty and vital task of the complete and revolutionary re-equipment of British air forces, notably Bomber Command. In other words, the general consensus of public thinking in Britain favoured the policy of rebuilding British military strength through the re-armament drive.

Thus the V-bomber force was born. It would have the task of accurately delivering a rapier-like thrust at lightning speed, if ever that unfortunate duty became necessary. Although the Canberra was the first jet bomber to go into service with the R.A.F. its scope of operations was largely tactical, while the new V-bombers would fill the strategic rôle.

Consequently an Air Staff requirement of 1947 led to the projecting of advanced designs for new jet bombers embodying wings of some 35 degrees sweep-back on which the results of theoretical research were available. Such a configuration of wing plan delayed compressibility effects at Mach numbers approaching the speed of sound and this technical consideration



The prototype Valiant WB210 during initial test flight showing original straight slotted air intake with airflow straighteners in port leading edge wing root.

eventually led to two decisions. One was to seek an aerodynamically advanced form with better performance characteristics and high development potential and the other was to order a less radical design with inferior performance to that of the more advanced types. This latter conception in fact materialised as the Short Sperrin prototype, which was designed and constructed as an insurance against the possible failure of the more ambitious designs.

Vickers submitted a tender for the high performance bomber competition and although at first this was not accepted, later study disclosed that it could meet the original specification in almost all requirements except that of range. While being less aerodynamically advanced than other submissions such as the Vulcan and Victor, it could on that account be available at an earlier date, an attractive proposition at that time.

Air Ministry Specification B.9/48 was drawn up around the Vickers design which was allocated the number 660 in Vickers Type list. The prototypes were ordered by contract on 2nd February 1949, the first to have four Rolls-Royce Avon R.A.3 turbojet engines and the second prototype, as Type 667, to be powered with four Armstrong Siddeley Sapphire turbojets.


Design proceeded in 1949, and in 1950 components were being made into complete assemblies at the Foxwarren experimental shop under the direction of Mr. A. W. E. (Charlie) Houghton, the then manager responsible for prototypes. Although the bomber was ordered "off the drawing board" in the modern manner, prototypes were still required at the time the Valiant (as Vickers B.9/48 bomber was subsequently named) was designed, probably because the concept of the project was then largely exploratory.


Final assembly of the new bomber began early in

1951 at Wisley and the first flight was made by J. "Mutt" Summers, accompanied by G. R. "Jock" Bryce, from the grass airfield there on 18th May 1951. This flight was a short one and only three more were made from Wisley before flight trials were transferred to Hurn, while a hard runway was being constructed at Wisley. The prototype Type 660 bore the serial number *WB210* and in June 1951 the Vickers bomber was officially called the Valiant, a repetition of the name used for Vickers Type 131 of 1931, a single-engined military tractor biplane.

Flight testing of *WB210* continued until 12th January 1952 when the aeroplane had to be abandoned in flight because of a fire in the port wing during stop and start tests in the air, concerned with internal noise level tests. All the flight crew except one, Sqn. Ldr.

Close-up of prototype Valiant disclosing short jet pipes, later lengthened to improve the local airflow and fuel tank ventilation.

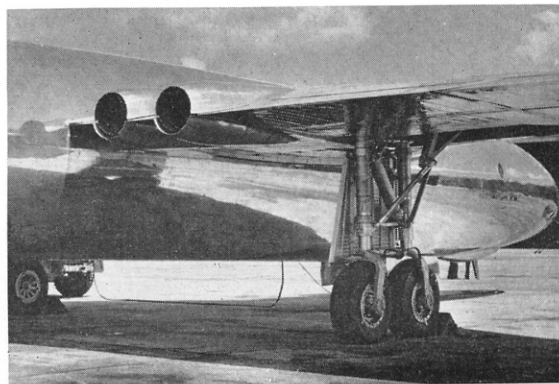

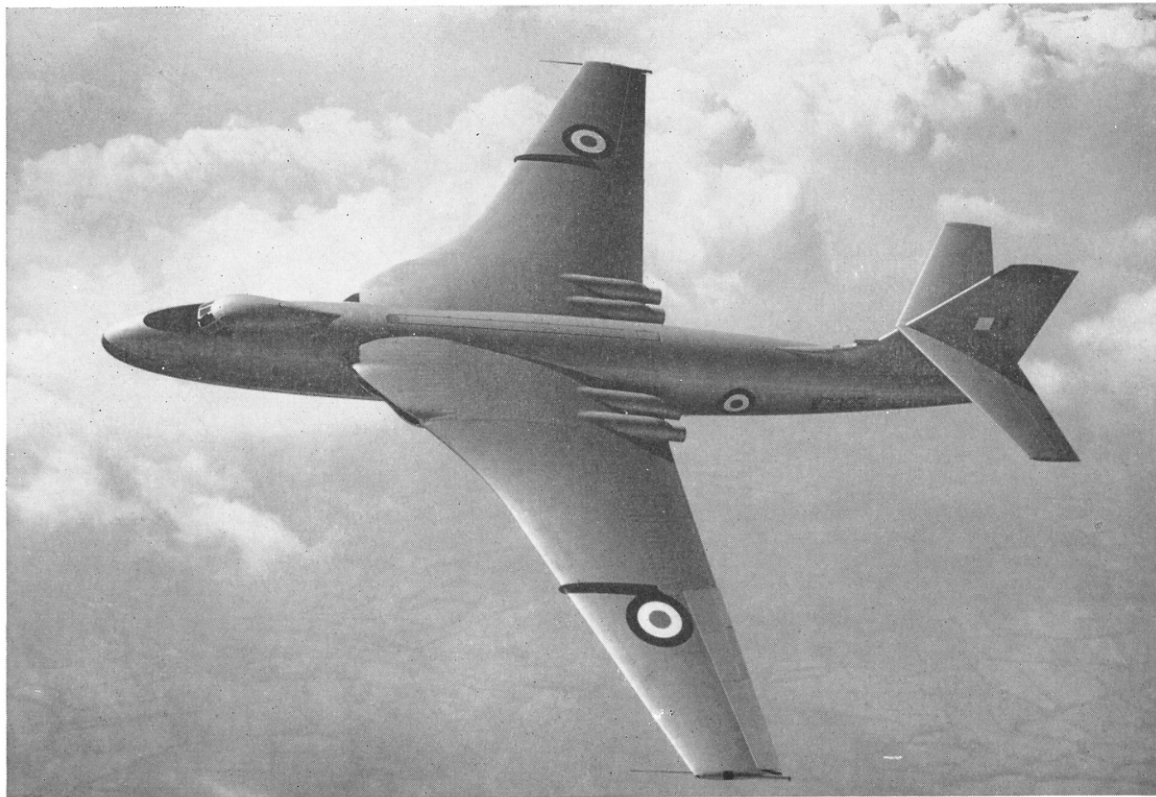

An early production Valiant (WZ365) in grey finish showing wing "fences" and protruding jet pipes.

Foster—co-pilot, escaped safely. Modifications to the atmospheric balance in the fuel system cured the fault which had led to a "wet" start on one engine and the fire.

Early flight trials of *WB210* had given sufficient indication of the promise of the design to satisfy the Air Staff. Completion of the second prototype, Type 667, was near so the loss of *WB210* was not as serious as it might have been in the absence of the original orders for three prototypes. This second Valiant, *WB215*, flew on 11th April 1952 at Wisley with R.A.7 Avons and not with Sapphires as originally planned.

An initial order for 25 Valiant B.1s had been placed in April 1951. The production of so large an aeroplane of technical complexity involved a considerable planning effort with a large amount of sub-contracting. Eight major sub-contractors were chosen, with Saunders-Roe responsible for the largest item, the pressurised crew compartment. Because of the shortage of suitable steel sections, pre-stressed concrete was employed for the interchangeable jig pillars, bolted to the shop floor.

VALIANT CONSTRUCTION


New production methods were developed and introduced to meet design requirements. Powered stretching and forming tools were used for leading edge and fuselage panels, fuselage frames and spar sections. Sculpture milling was introduced for the first time by Vickers to manufacture the centre section spar web plates. Synthetic bonding was applied to doubling plates on control surfaces. A special glass cloth/plastic bonding shop was started to fabricate various dielec-

tric components such as the nose radome and suppressed aerials as well as ducting for the air system.


The Valiant was a "shoulder" wing aeroplane with variable sweep on the leading edge. The four Avon turbojets were buried in the inner wing as was British practice at the time of design, contrasted with the contemporary American practice of engine pods underslung below the wing. The intakes were long rectangular slots extending from the wing root leading edge outboard in the first prototype. Before the first flight, vertical airflow straighteners were added in the mouths of the intakes but in subsequent Valiants the familiar "spectacle" type entries were adopted to provide for a larger mass flow of intake air to feed the higher power R.A.7, R.A.14 and R.A.28 Avons.

With the shoulder wing configuration, a cavernous bomb-bay was provided in the circular section fuselage and so the Valiant became in due course the first of the "V" bombers capable of accommodating the Blue Steel "stand-off" weapon. The tailplane was mounted part-way up the vertical fin to be well clear of the jet efflux.

With a large wing and consequently a comparatively low loading the requirements for short take-off and long range were adequately met by the Valiant. A broad chord inboard enabled the root thickness to be no more than twelve per cent, although embodying sufficient depth to accommodate the power units with their ancillary systems and accessories. In addition, this wide root chord facilitated a larger angle sweep-back at the inner third of the wing span and so raised the local critical Mach number in an area where the

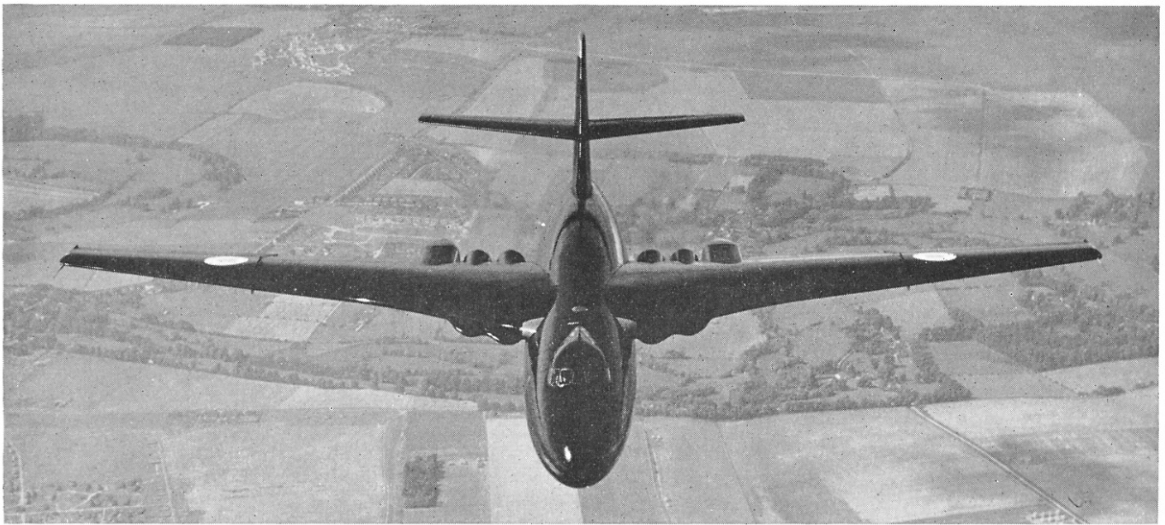

Sole example of the Valiant B.2 was WJ954. The B.2 had a lengthened nose and the main undercarriage legs retracted back into large fairings on the wing trailing edge. Overall finish was glossy black with white serial numbers.

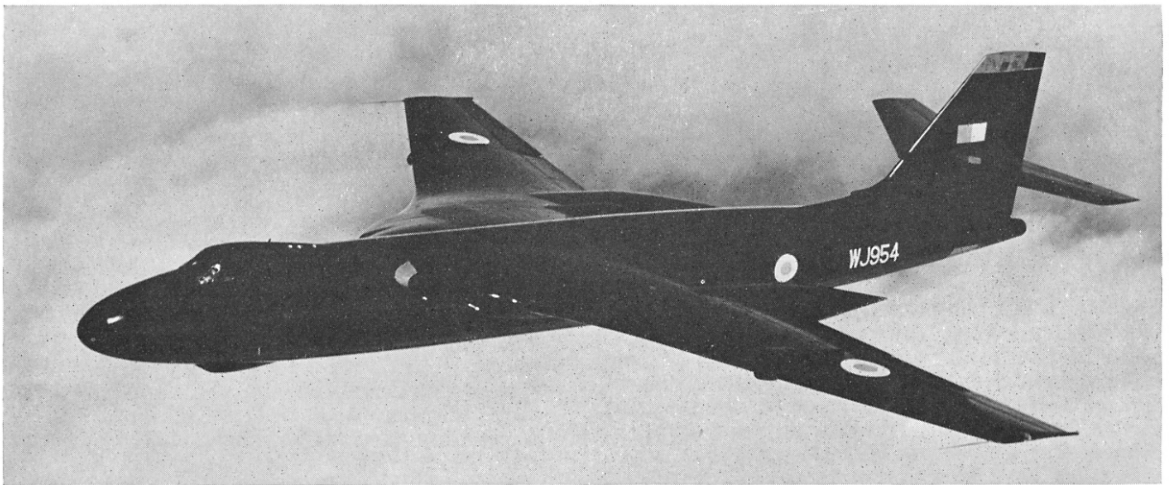


airflow accelerating around the fuselage nose met the wings. The amount of sweepback was decided by the need to achieve an aerodynamic wing centre coincident with the centre of gravity, thus promoting stability and enabling a smaller variable incidence tailplane to be used.

A massive “backbone” member running along the top of the fuselage down the centre line with two branches at right-angles on each side linking up with the main outer wing spars formed the primary Valiant structure. Bomb loads or other “stores” were hung from this keel beam, the side members only taking the lift loads from the wings. These side members were in fact the main spars of the centre section, joined at the fuselage centre line, bifurcated and reinforced around the engines. Outer plane spars were heavy channel section booms tapering towards the wingtips. The stressed skin wing was constructed on a system of spanwise stringers and built-up ribs. Fuel tanks in the outer planes were of the flexible bag type.

The Valiant fuselage followed the general pattern of high tensile light alloy, stressed skin construction and embodied Vickers traditional system of flush-riveted

skin attached to the longitudinal stringers only, the circular frames being inside the stringers to which they were cleated. The pressurised “egg” which housed the crew had a concave diaphragm bulkhead forward, with radial stiffening beams and the aft bulkhead was an unstiffened convex shell. The “neutral hole” theory as developed in the first Viscounts was applied to the canopy, oval side windows and oval door, starboard emergency exit hatch, roof sextant dome and floor bomb-aimer’s compartment. The door was provided with a wind shield for baling out—only the two pilots had ejection seats.

Aft of the cabin the main part of the fuselage, with the keel beam and associated primary structures, also included the nosewheel bay, the servicing bay (the “organ loft”), rear equipment bay, bomb bay and air deflector. This last item comprised a portion of the underside of the fuselage just aft of the bomb bay. It moved up as far as the top rear of the bay to blank off the airflow into the fuselage when the bomb doors opened, as these travelled upwards on an electrically-driven mechanism inside the fuselage to avoid increasing the drag.

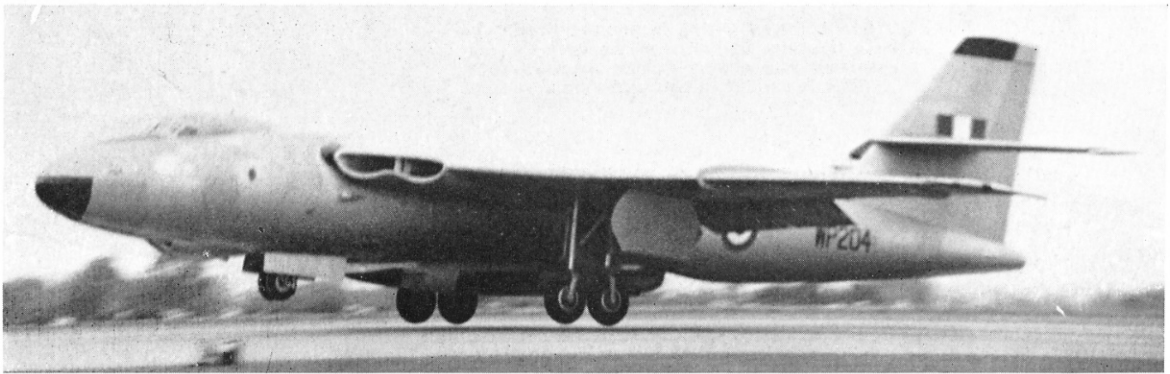

Valiant WP204 taking-off for trials with the Blue Steel stand-off bomb. Belly of the Valiant was modified to accommodate Blue Steel.

In the systems design, the Valiant made almost exclusive use of electrics. The one hydraulic system in the aeroplane was for brakes and steering gear but even its pumps were driven by electric motors. The main control surfaces were power-operated but capable of selective reversion to manual control. A high voltage 112-volt D.C. system was chosen as the 28-volt came out heavier and at the time of design (1948) the A.C. system was insufficiently advanced in development for this purpose. The sideways and outwards retracting undercarriage, consisting of dual legs and wheels arranged in tandem, was operated by an electrical actuator through worm gearing. The undercarriage assembly stowed into wells in the wing between the fuselage and engine mountings and, when retracted, was closed by large doors.

Four types of Valiant entered service. Type 706 was B. Mark I bomber, Type 710 was B.(PR.) Mark 1 bomber or photographic-reconnaissance, Type 758 was B. (K.) Mark 1 flight refuelling receiver aircraft (bomber or tanker rôle) and Type 733 B.PR. (K.) Mark 1—"F.R." receiver for bomber, photographic, reconnaissance or tanker rôles. In addition a number of indefinite variants of the basic B. Mark 1 were evolved for a variety of special rôles as will be evident from the short account which follows of the Service career of the Valiant.

One other Mark number was required and that was for the B. Mark 2 low-level "pathfinder" bomber (Vickers Type 673) which after its appearance at the S.B.A.C. show of 1954 was christened the "black bomber" from its night finish paint. The distinctive

difference from all other Valiants was the underslung pods or nacelles into which the undercarriage retracted backwards. As the intended rôle for this version was at low level, the main stress bearing structure had to be considerably strengthened, involving the use of the standard wheel well spaces for this purpose.

The Valiant B.2 was the last prototype to be built at the Foxwarren experimental shop and was moved in large assemblies along the Portsmouth Road (A.3) to Wisley where it was completed and then flown, by "Jock" Bryce with Brian Trubshaw as co-pilot, on 11th April 1952. All along its construction had been supervised by Mr. A. W. E. Houghton. To him and his team should be attributed the remarkable speed with which the whole Valiant programme was engineered through to the successful production of 104 modern bombers of high complexity, efficiency and performance, in service in well under ten years from the start of project design.

INTO SERVICE


Confronted by what was virtually a "new deal" aeroplane, and charged with the task of creating the nucleus of Britain's deterrent force of fast, high-altitude bombers carrying nuclear weapons over great distances with accurate delivery, Bomber Command formed an Operational Conversion Unit (No. 232) at Gaydon. This was to train V-force squadrons in the operation and maintenance of Valiants.

To assist this training a Valiant servicing school was

(Continued on page 10)

The Valiant (WZ366) which dropped Britain's first atomic bomb at Maralinga, Australia, on 11th October 1956.


(Photo: Ministry of Defence)

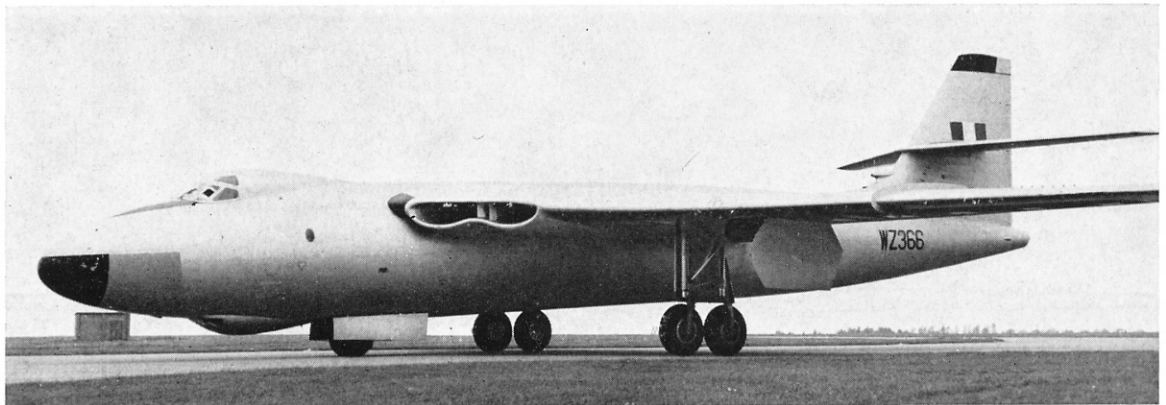

established at Gaydon in the latter half of 1954 after instructors had attended lengthy courses at Vickers's own servicing school at Weybridge, and also those of Rolls-Royce and Boulton Paul Aircraft to study engine and power control systems respectively.


The first Squadron to receive Valiants was No. 138 at Gaydon, Warwickshire, commanded by Wing Commander R. G. W. Oakley, D.S.O., D.F.C., A.F.C., D.F.M., who had spent three years as liaison officer of Bomber Command with Vickers.

On 5th September 1955 two Valiants under the command of Squadron Leader R. G. Wilson, D.F.C., left Wittering on proving trials from No. 138 Squadron. Operation "Too Right", as it was called, carried the flag of Britain's first V-bomber to Singapore, Australia and New Zealand. There it was seen and flown by the R.A.A.F., and R.N.Z.A.F. to their complete satisfaction. No major unserviceability was encountered throughout a tour in which the two Valiants totalled almost 146 flying hours. At the same time, there was a fly-past of six pairs of Valiants from Wittering and Gaydon at the Flying Display of the Society of British Aircraft Constructors at Farnborough. The final test of the capabilities of the aircraft, apart from air exercises and detailed assessment of specialised equipment, was carried out in the spring of 1956 when No. 138 Squadron flew four Valiants for 1,000 hours.

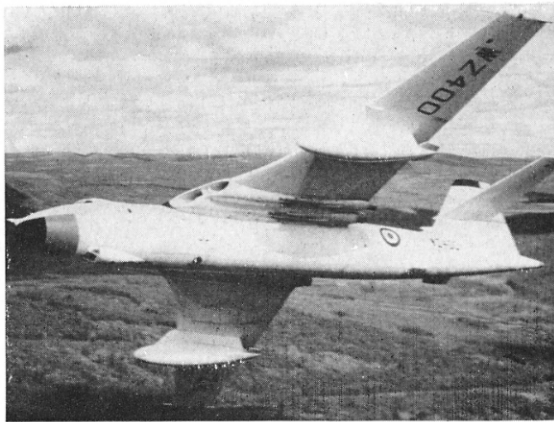


Valiant WZ400 over Goose Bay, Labrador, during the "Snow Trip" operation in Canada. (Photo: Ministry of Defence)

In June 1956 the Valiant was flown with Super Sprite high test peroxide motors for rocket-assisted take-off. Water-methanol injection was fitted as standard to all Valiants for use in take-off and for extra power boost in high ambient temperatures and in other operational conditions. During the following winter the Valiant was tested in Canada on winterisa-

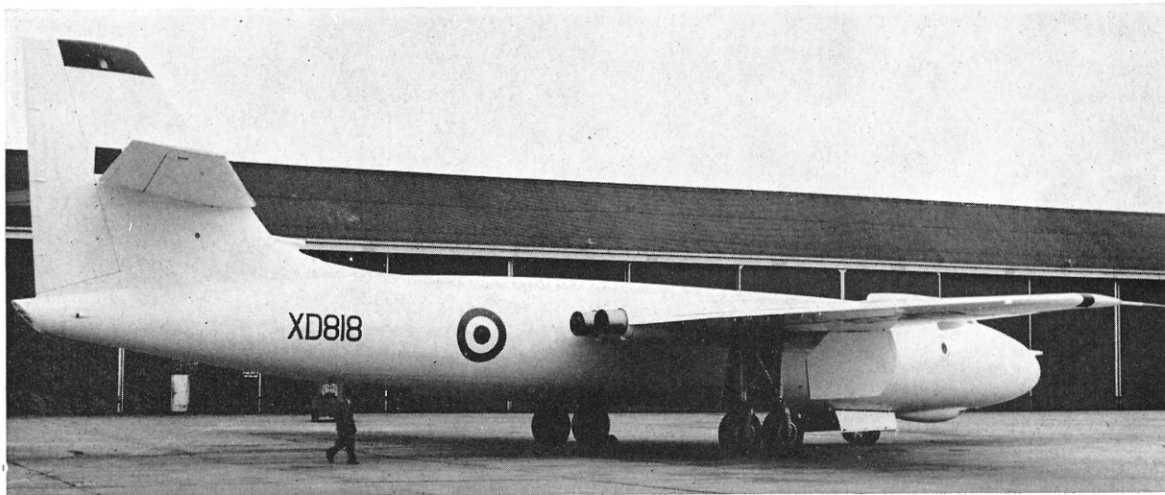

Above: XD818, the Valiant which dropped Britain's "H" bomb at Christmas Island, on 15th May 1957, in its special overall white finish. Below: XD818 preserved at Marham in low-level camouflage scheme and destined for the R.A.F. Museum.

(Photo: Royal Air Force)

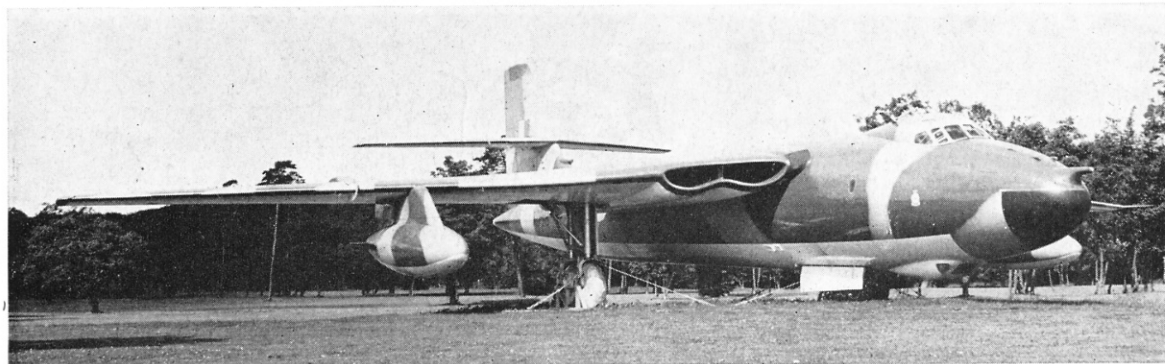



A typical photograph of a Bomber Command Valiant (XD823) in flight before the introduction of anti-flash roundel and fin stripe paint.

tion trials. Meanwhile, in July 1956, H.M. the Queen inspected Bomber Command units at Marham comprising an impressive concentration of Valiant V-bombers.

Events crowded in on the Valiant. On 11th October 1956, No. 49 Squadron equipped with the aircraft participated in radiation and other tests during the dropping of Britain's "A" bomb at Maralinga, Australia, by a Valiant commanded by Squadron Leader E. J. G. Flavell, A.F.C. Almost simultaneously Nos. 138, 148, 207, and 214 Squadrons moved to Luqa, Malta, from which base their Valiants went into action in the Suez campaign, thus becoming the first and only bomber of the V-force to drop bombs "in anger". On 15th May 1957, a Valiant also of No. 49 Squadron, under the command of Wing Commander K. G. Hubbard, O.B.E., D.F.C., A.F.C., was selected to drop Britain's first "H" bomb in the Christmas Island "Operation Grapple".

In a more peaceful arena, Valiants represented No. 3 Group, in Bomber Command in the Strategic Air Command's bombing, navigation and reconnaissance competition held at Pinecastle, Florida, U.S.A., at the end of October 1957. The Valiant wing was placed 27th out of 45 wings competing, Squadron Leader R. W. Payne, of No. 214 Squadron, and his crew were placed 11th out of the 90 crews competing.

The following year's competition at March Air

Force Base, California, saw the R.A.F. "B" team of Valiants in 7th place in combined bombing and navigation out of 41 participating wings. An individual crew, led by Squadron Leader R. W. Richardson of No. 148 Squadron, achieved the high distinction of the 9th place out of 164 competing crews. These efforts were a remarkable testimony to the efficiency of both aircraft and crew, as the R.A.F., with their comparatively small number of competing aircraft had the odds against them.


Other operations undertaken by Valiants included "Snow Trip", a survey of the DEW (distant early warning) radar chain across the Canadian Arctic border; "Dectra", a comparative test of many sorties of Decca and VOR/DME navigation systems over the North Atlantic (Boscombe Down Valiant *WP210*) and "Lone Ranger", which consisted of routine flights by single R.A.F. aircraft overseas.

For some years, a large force of R.A.F. Canberras had been allocated to the Supreme Allied Commander Europe as part of Britain's contribution to N.A.T.O. Forces. Later, the decision was taken to replace these Canberras by a force of Valiants. Valiants thus not only formed part of Britain's V-force but also augmented the striking power of N.A.T.O.

Early in 1959, No. 214 Squadron, based at Marham, started a series of operational trials of the flight refuelling system, which proved satisfactory. It gave

The last Valiant XD865 taking-off from Brooklands for delivery to the Royal Air Force.



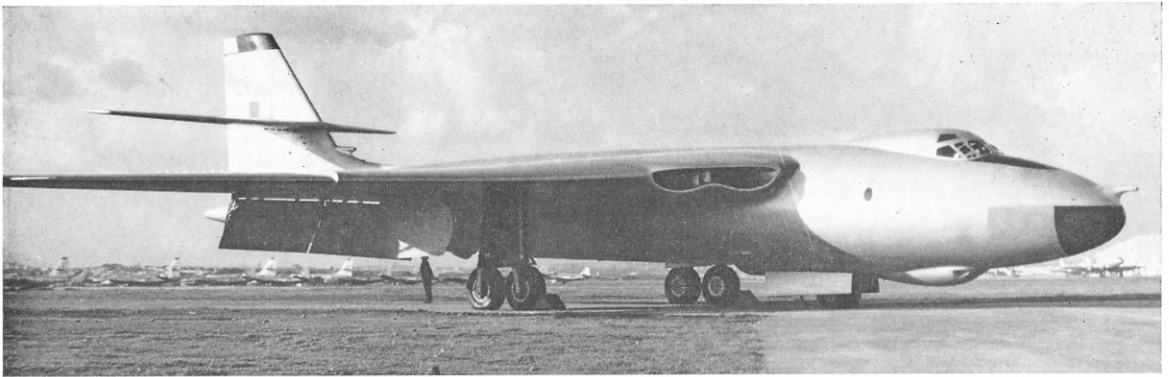

A Valiant with others in the background, at Luqa Airbase, Malta, in readiness for the Suez campaign, 1956.

the V-bomber force greater flexibility and radius of action and fortified its strategic dispositions.

On page 16 is a list of the principal flights made by 214 Squadron, some of which are unofficial records, together with the name of the aircraft commander, the distance covered non-stop, and the elapsed flying time.

These flights showed that the flight refuelling system, devised and developed by the firm of that name under Sir Alan Cobham, K.B.E., A.F.C., was eminently suitable for application to modern military aircraft. They also proved that the Valiant was an adaptable aircraft and its many achievements during its operational service with the Royal Air Force underlined the wisdom of Sir George Edwards when he decided to offer the Service an "unfunny" aircraft, to use his own description, in the shortest possible time.

Vickers Valiant was, in fact, ordered in November


1948, the prototype flew in May 1951, and the first production aircraft flew in December 1953 and it was delivered to the R.A.F. in January 1955. From the sixth aeroplane, the programmed delivery dates were maintained from 1955 onwards. The steady flow of Valiants was greatly assisted by the co-operation of the many sub-contractors in meeting their target dates. The Valiant proved extremely easy to service, despite its original features and electrical systems. No major "snags" emerged that could not be quickly ironed out and in Bomber Command the aeroplane remained constantly in readiness on dispersal bases.

The principal stations which operated Valiants were Marham and Honington (strike and tanker aircraft), Wyton (Recce) and Gaydon (OCU). A proportion of

(Continued on page 14)


A Valiant taking-off at Farnborough with Super Sprite RATOG urge.



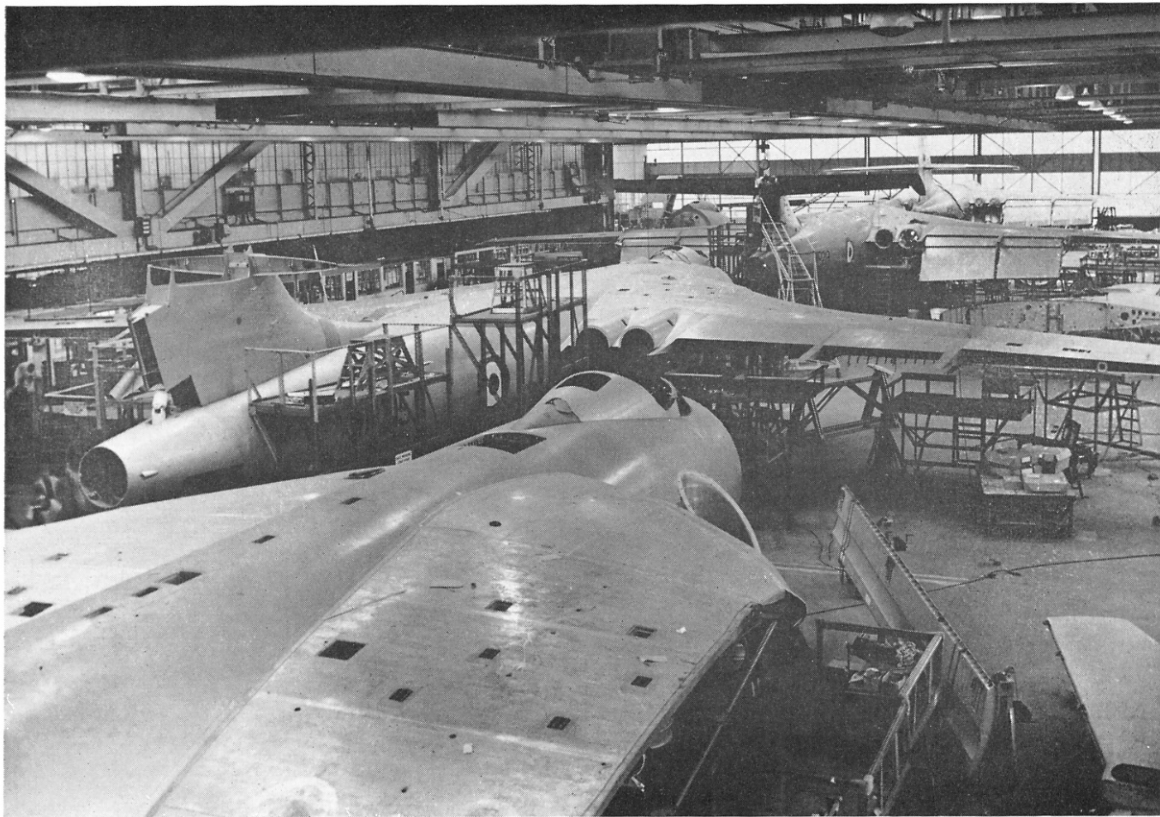

Valiant production line at the Vickers' Weybridge works.

Left: Close-up of a Valiant's main undercarriage reveals tandem wheels and supporting half-forks and main compression strut. Note panelling pattern on skin. Right: A Rolls-Royce Avon turbojet engine, one of four, being winched into position at Vickers, Weybridge.

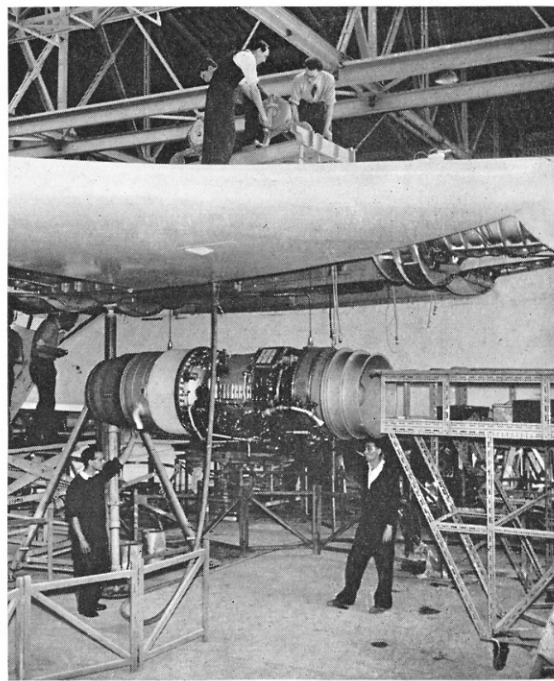



A complete Valiant team of aircrew, ground engineers and ground support equipment mustered before a Valiant of Bomber Command.
(Photo: Ministry of Defence)

the aircraft operated from Marham were those assigned to N.A.T.O.

The Valiant, in common with the other V-bombers, assumed a low-level operational rôle early in 1964. This was officially declared by the Air Minister in February 1964 at R.A.F. Wittering. Low-level operations followed the re-assessment of potential enemy defence effectiveness which showed that high-level operations at subsonic speeds were too dangerous. To reduce the likelihood of visual detection, low-level Valiants were repainted in a camouflage colour scheme reminiscent of W.W.II.

A Valiant aircrew "scrambling" aboard a Bomber Command Valiant. Elapsed time between warning and airborne condition was four minutes, an advantage conferred by the introduction of the jet engine to first-line bombers. (Photo: Ministry of Defence)




Valiants were officially withdrawn from service at the end of January 1965, after investigation had shown that the main wing spars were suffering from severe metal fatigue on all aircraft. Although repair schemes were feasible, it was decided, for reasons of economy, not to proceed with them and the force was scrapped. One or more of the historic aircraft concerned in the British atomic bomb tests is to be preserved in the R.A.F. museum when it is established.

© C. F. Andrews, 1966

**OTHER ENLARGED PROFILES TO BE
PUBLISHED DURING THE PERIOD
JANUARY-JUNE 1966:**

No. 65	The Avro Lancaster	...	January	1966
No. 69	The Henschel Hs 129	...	February	1966
No. 72	The Vickers Viscount			
	Srs. 700	February	1966
No. 74	The Short 184	March	1966
No. 77	The Boeing B-17E & F	...	March	1966
No. 83	The Boeing B-47	...	April	1966
No. 84	The Short C-Class Boats		April	1966
No. 88	The Ilyushin Il-2	...	May	1966
No. 89	The Savoia S.M.79	...	May	1966
No. 93	The Bristol Blenheim I		June	1966
No. 96	The Douglas DC-3			
	(pre-1942)	June	1966

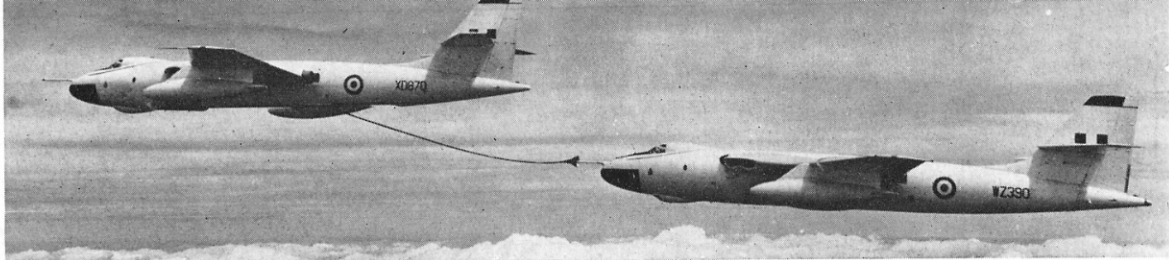

A Valiant B. (K) Mk. 1 tanker flight refuelling a Valiant B.PR. (K) Mk. 1 receiver. Note modified belly of tanker aircraft. (Photo: Ministry of Defence)

VALIANT PRODUCTION

Contract 6/Aircraft/6313 CB.6 (c)	25 aircraft.
WP199-WP204 (B. Mk. 1), WP205 (B.PR. Mk. 1), WP206-WP216 (B. Mk. 1), WP217 (B.PR. Mk. 1), WP218 (B. Mk. 1), WP219 (B.PR. Mk. 1), WP220 (B. Mk. 1), WP221 (B.PR. Mk. 1), WP222 (B. Mk. 1), WP223 (B.PR. Mk. 1).	
Contract 6/Aircraft/7375 CB.6 (c)	24 aircraft.
WZ361-WZ375 (B. Mk. 1), WZ376 (B.PR. (K) Mk. 1), WZ377-WZ379 (B.PR. Mk. 1), WZ380 (B.PR. (K) Mk. 1), WZ381 (B.PR. Mk. 1), WZ382 (B.PR. (K) Mk. 1), WZ383-WZ384 (B.PR. Mk. 1).	
Contract 6/Aircraft/7376 CB.6 (c)	17 aircraft.
WZ389-WZ399 (B.PR. (K) Mk. 1), WZ400-WZ405 (B. (K) Mk. 1).	
Contract 6/Aircraft/9446 CB.6 (c)	38 aircraft.
XD812-XD875 (B. (K) Mk. 1).	

Total all Marks 104

Complete refuelling equipment being installed in a Valiant, of No. 214 Squadron, converted to tanker rôle.



GENERAL DATA B. (K) Mk. 1

Dimensions: Span 114 ft. 4 in. Length 108 ft. 3 in. Height 32 ft. 2 in.
Areas: Wing 2,362 sq. ft. Horizontal tail surfaces 380.5 sq. ft. Vertical tail surfaces 38.5 sq. ft.
Weights: Empty 75,881 lb. Operating 77,408 lb. Max. military load 21,000 lb. Max. take-off (10,000-lb. bomb) 138,000 lb. Overload max. (underwing tanks) 175,000 lb. Max. landing 98,000 lb.
Military load: One 10,000-lb. bomb or 21 x 1,000-lb. bombs or two fuel tanks in bomb bay of 1,615 Imp. gall. each.
Power: Four Rolls-Royce Avon R.A.28 Mk. 204 of 10,000 lb. static thrust each.
Fuel: Max. capacity with underwing tanks, 9,972 Imp. gall.
Crew: Five in pressurised compartment—two pilots side by side, with two navigators and an electronics engineer on aft facing seats—two extra crew in tanker rôle.

PERFORMANCE DATA

The following performance figures are given for an aircraft of maximum all-up weight of 140,000 lb., including one 10,000-lb. bomb, and without underwing tanks (unless otherwise stated).

Vickers Valiant B Mk. 1

Maximum level speed: Mach No.=0.84, above 30,000 ft. decreasing to 414 m.p.h. at sea level, I.S.A.
Maximum cruising speed: Mach No.=0.82 above 30,000 ft.
Economical cruise-climb speed: Mach No.=0.75. Cruise-climb commences at 39,000 ft. and continues to 46,000 ft. on a typical 2,500-mile flight.
Stalling speed: 94 m.p.h. with 55° of flap, at 90,000 lb. I.S.A. sea level conditions.
Initial rate of climb: At maximum T.O. weight of 140,000 lb. approximately 4,000 ft. per minute from sea level with 7,800 r.p.m. I.S.A. conditions.
Service ceiling: 54,000 ft. On typical flight service ceiling is 46,000 ft.
Service ceiling, one engine inoperative: 40,000 ft. at 110,000 lb. with 7,600 r.p.m. at I.S.A. conditions.
Take-off run to unstuck at 1.2 Vs: 3,600 ft. at 140,000 lb. sea level, I.S.A. conditions. (Excluding the use of Super Sprite rockets or water methanol injection.)
Take-off distance to 50 ft.: 4,700 ft. 140,000 lb. sea level, I.S.A. conditions.
Landing distance from 50 ft.: 5,500 ft. at 110,000 lb.
Landing run from touchdown: 3,500 ft. at 110,000 lb.
Maximum range: Carrying 10,000 lb. bomb half-way and no reserves, 3,450 miles; with underwing tanks 4,500 miles.

Vickers Valiant B Mark 2

Maximum speed: 665 m.p.h. at sea level.
Maximum achieved level speed at sea level: 552 m.p.h.

NON-STOP FLIGHTS BY VALIANTS OF No. 214 SQUADRON, R.A.F., USING FLIGHT REFUELLING

Date	Flight	Distance, st. miles	Time, hr. min.	Speed, m.p.h.	Captain
April 7th 1959	Marham—Nairobi	4,350	07.40	562	Flt.-Lt. B. E. Fern
May 28th 1959	Marham—Salisbury	5,320	09.42	548	Sqn. Ldr. J. H. Garstin
June 18th 1959	Marham—Johannesburg	5,845	11.03	529	Wg. Cdr. M. J. Beetham
July 9th 1959	O/h L.A.P.—Cape Town	6,060	11.28	530	Wg. Cdr. M. J. Beetham
July 14th 1959	Cape Town—O/h L.A.P.	6,060	12.20	492	Wg. Cdr. M. J. Beetham
January 19th 1960	Marham—Offutt	4,336	09.30	461	Wg. Cdr. M. J. Beetham
January 25th 1960	Offutt—St. Mawgan	4,400	09.03	488	Wg. Cdr. M. J. Beetham
March 2nd—3rd 1960	Marham—around U.K.	8,500	18.05	—	Sqn. Ldr. J. H. Garstin
May 25th 1960	Marham—Changi	8,110	15.35	523	Sqn. Ldr. J. H. Garstin
June 1st 1960	Butterworth—Marham	7,770	16.16.5	476	Sqn. Ldr. J. H. Garstin
July 5th 1960	Marham—Vancouver	5,007	10.28	481	A.V.M. M. H. Dwyer
July 8th 1960	Vancouver—Marham	5,007	09.35	523	A.V.M. M. H. Dwyer